



Bluetooth Temperature and Humidity Data Logger with External Probes Optional

BlueTag TH10 and BlueTag TH30 are multi-use temperature and humidity data loggers based on Bluetooth wireless communication technology, which makes it more convenient for users to flexibly configure them via our APP and view both real-time and historical data on the APP, without unpacking the goods. The APP we provide also allows multiple users to view data online simultaneously. Besides, one or two external probes can be optionally set as needed. These loggers can be used in freezer, medicine cabinet, wine cellar, warehouse, greenhouse, incubator and other scenarios where accessibility and mobility are crucial.



Signature and email sending service for data report



Data synchronization among multiple users



Geolocation optional



Paired by Bluetooth and review history by APP



Flexible ultra thin cable (0.3mm thick and 7.5mm wide)



Up to 3 monitoring channels



Max. /Min. /Average summary report









Comprehensive data analysis, filtration and graphing



WiFi/4G gateways optional for real-time monitoring

EASY TO USE

-  Download and install APP
-  Press the button for 5S to start the device and plug the external probes in.
-  Scan QR code on the device to add and configure it
-  Put the external probe into the refrigerator and fix the main device outside.
-  View and share data
-  All users view the data and report synchronously

Model	BlueTag TH10R	BlueTag TH10R-I	BlueTag TH30B	BlueTag TH30R	BlueTag TH30R-I	BlueTag TH30R-ETU
Communication Distance	60m/112m (Open air)		50m/100m (Open air)			
Installation	Wall mounting, folding stand, magnetic suction		Wall mounting, folding stand	Wall mounting, folding stand, magnetic suction		
Battery	Rechargeable lithium battery		2*Replaceable AAA batteries	Rechargeable lithium battery		
Weight	80g (Main device)		85g	90g (Main device)		
External Probe	See External Probe List		x	See External Probe List		
Built-in Sensor	-30℃~+70℃, ±0.5℃ F.S.					
	0~100%RH, ±3%RH					
Temperature Units	℃, °F					
Start Delay	0min~72h					
Logging Interval	1min~99min					
Memory Capacity	20,000 readings each probe					
Alarms	Max. 6 alarm points each probe					
Report	PDF/CSV					
Connection	Bluetooth 5.2					
APP OS	Android / iOS					
APP Language	Chinese, English, French, German, Portuguese, Russian, Spanish					
Device Dimensions	83mm*68mm*20.5mm					

External Probe List

Probe Type	Measuring Range	Measuring Accuracy
Temperature Probe	-30℃~+70℃	±0.5℃ (-30℃~+50℃) / ±1.0℃(Others)
	-196℃~+200℃	±0.5℃ (-100℃~+80℃) / ±1.0℃ (Others)
	-90℃~+200℃	±0.3℃ (-40℃~+100℃) ±0.5℃ (-80℃~-40℃; +100℃~+150℃) / ±1.0℃ (Others)
Temperature and Humidity Probe	-40℃~+85℃ / 0~100%RH	±0.5℃ F.S. ±3%RH (25℃, 20%~90%RH) / ±5%RH (Others)
Standard cable length: 2m; Customizable length available: 5m, 10m, 15m or 20m.		

APPLICATION

BlueTag TH10 and BlueTag TH30 Bluetooth temperature and humidity data loggers are suitable for temperature and humidity monitoring in the fields like smart house, food, archives management, drug storage, incubator, refrigerator car, laboratory, greenhouse, animal farming.



GREENHOUSE CULTIVATION



SMART HOME




DRUG STORAGE



TRANSPORT

Bluetooth Temperature and Humidity Monitoring with History Data Tracking from APP

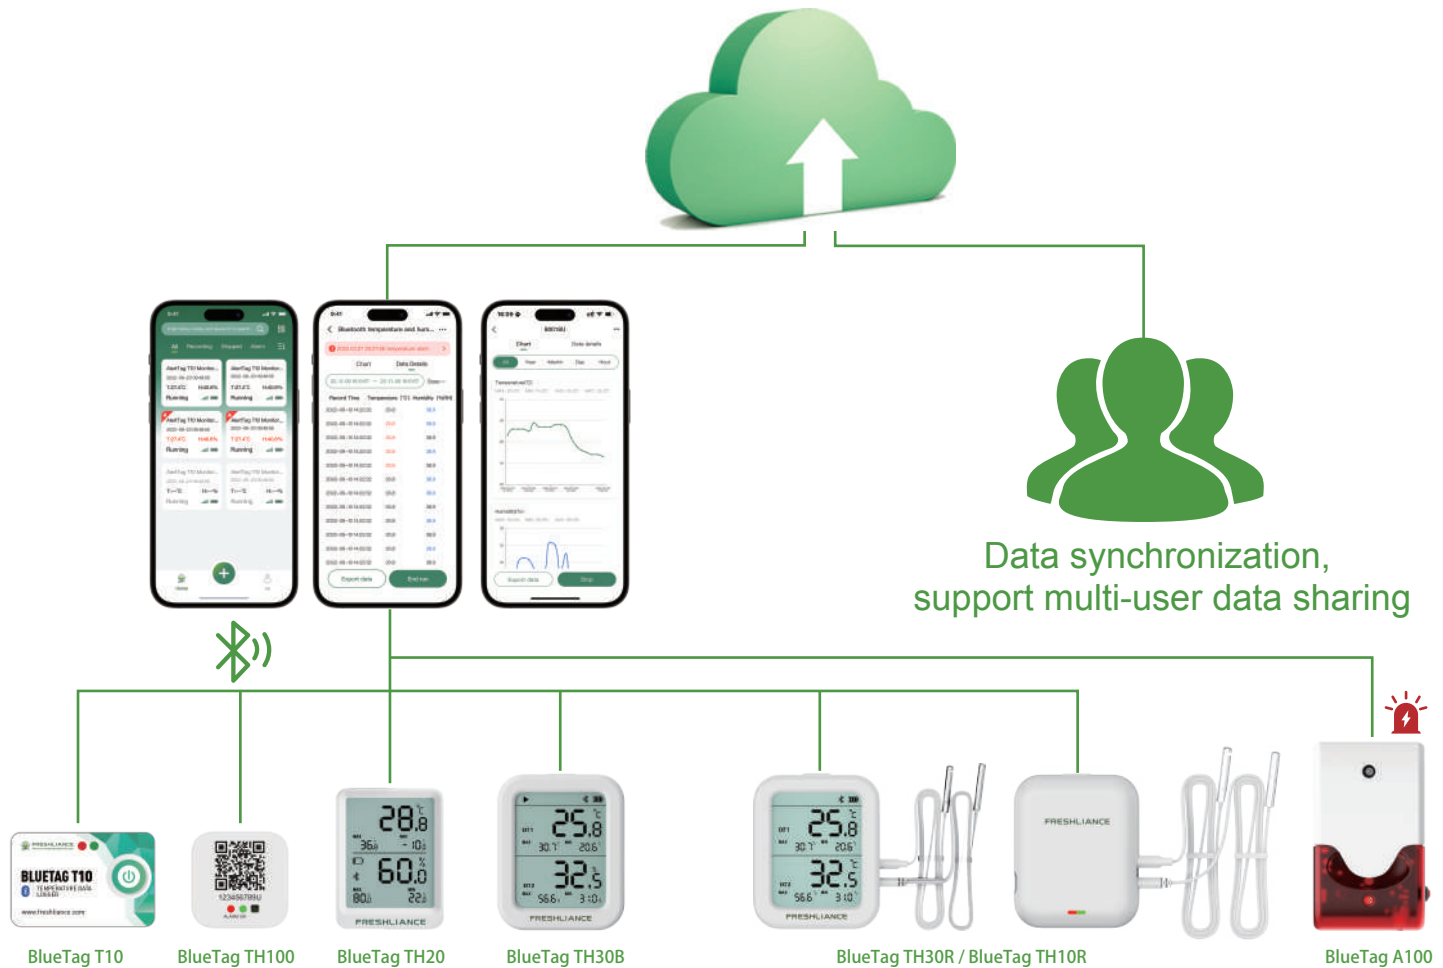

Freshliance Electronics Corp., Ltd. is an ISO9001–certified enterprise. It is committed to environmental logging and IOT solution development based on independent temperature verification environments. We have a professional software and hardware team in the field of Bluetooth/Lora/NFC/RF/WiFi/2G/4G/5G, etc. We strive to maintain the best quality products and service for you and are ready for your tailor–made solutions.



EN12830



GSP

DO-160